

D-Link® Quick Installation Guide

This product can be set up using any current web browser, i.e., Internet Explorer 6x, Netscape Navigator 7x.



DI-604UP

Ethernet Broadband Router
and USB Print Server

Before You Begin

1. If you purchased this router to share your high-speed Internet connection with other computers, you must have either an Ethernet-based Cable or a DSL modem with an established Internet account from an Internet Service Provider (ISP).
2. It's best to use the same computer that is connected to your modem for configuring the DI-604UP router. The DI-604UP Broadband Router acts as a DHCP server and will assign all the necessary IP address information on your network. **See Appendix at the end of this Quick Installation Guide or the Manual on the CD-ROM for setting each network adapter to automatically obtain an IP address.**

Check Your Package Contents

These are the items included with your DI-604UP purchase:



• DI-604UP Broadband Router



• CD-ROM (containing Manual ,Quick Installation Guide ,DCC Utility and Warranty)



• Ethernet (CAT5 UTP/Straight-Through) Cable



• 5V DC, 2 A Power Adapter



Using a power supply with a different voltage rating will damage and void the warranty for this product.


If any of the above items are missing, please contact your reseller.

©2005 D-Link Systems, Inc. All rights reserved. Trademarks or registered trademarks are the property of their respective holders. Software and specifications subject to change without notice.

1

Connecting The DI-604UP Broadband Router To Your Network

- A.** First, connect the power adapter to the **receptor** at the back panel of the DI-604UP and then plug the other end of the power adapter to a wall outlet or power strip. The Power LED will turn **ON** to indicate proper operation.
- B.** Insert one end of an Ethernet cable to the **WAN port** on the back panel of the DI-604UP and the other end to the Ethernet port located on your Cable or DSL modem. The WAN LED light will illuminate to indicate proper connection.
- C.** Insert one end of an Ethernet cable to **LAN port 1** on the back panel of the DI-604UP and the other end to an available Ethernet port on the network adapter in the computer you will use to configure the DI-604UP. The LED light for LAN Port 1 will illuminate to indicate proper connection. (Note: Some computers already have network adapters pre-installed.)

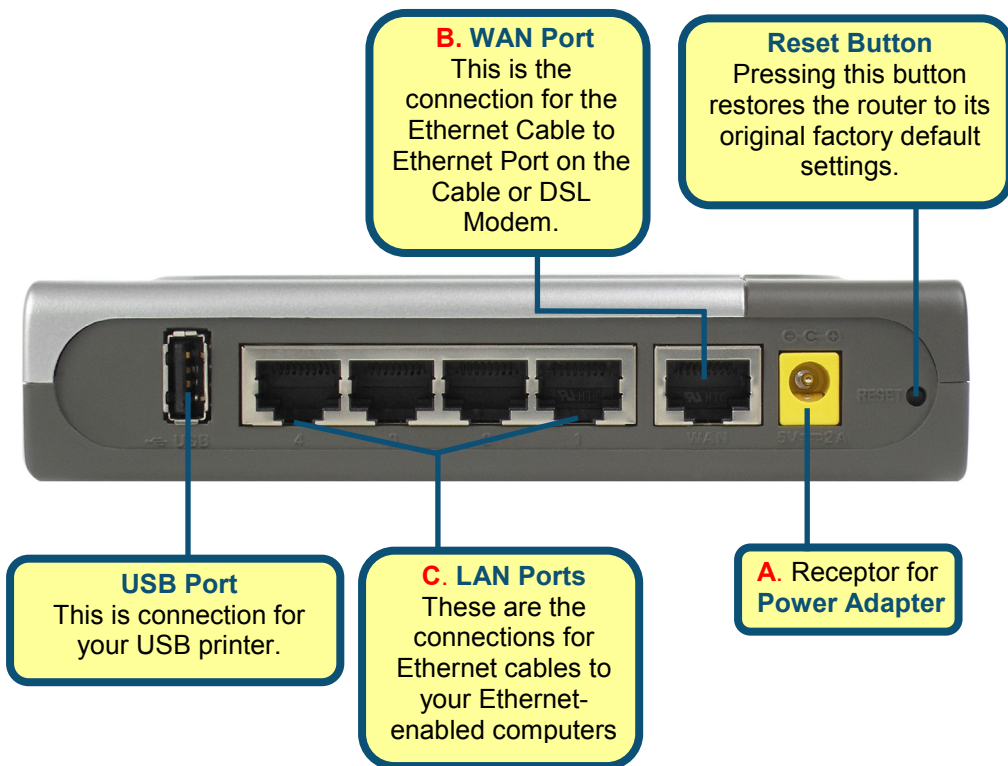

2

Restart Your Computer


3

Connecting Additional Devices to the DI-604UP Broadband Router

Using additional Ethernet (CAT5 UTP/Straight-Through) cables, connect your Ethernet-equipped computer(s) to one of the 3 remaining Ethernet LAN ports on the back panel of the DI-604UP.

LAN Port LEDs.

Each of the LAN ports on the back of the DI-604UP have a corresponding LED light on the front panel of the unit. When a proper connection has been made to a computer that is ON, the LED on the front panel should illuminate.

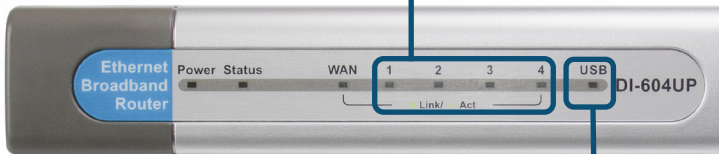


USB Port LED.

The USB port on the back of the DI-604UP has a corresponding LED light on the front panel of the unit. When a proper connection has been made to a device that is ON, the LED on the front panel should illuminate.

Additional printer may be added to your DI-604UP to increase functionality. By connecting a printer to the USB port at the back of the router, you may share print capabilities over your wired network. A valid USB connection will cause the corresponding USB LED at the front to light. For more information regarding USB connections and device implementation, see the DI-604UP user guide.

When you have completed the steps in this *Quick Installation Guide*, your connected network should look similar to this:

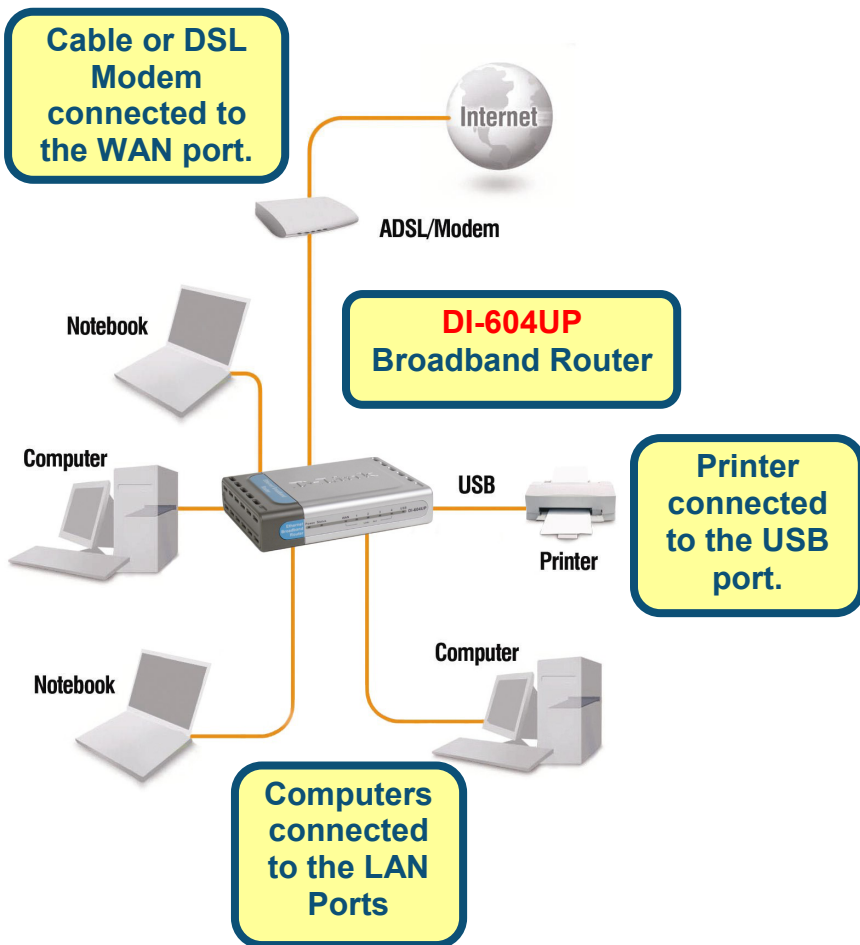


4


Using the DWizard

The DI-604UP offers two easy-to-use methods to set up and manage the Router. The first, the D-Link Click'n Connect DWizard, is a stand-alone configuration utility located on the CD-ROM that came with your DI-604UP. This method is described briefly below. The second method uses a Setup Wizard that is part of the Router firmware. Please see section 5 for detailed instructions on how to use this wizard.

To launch the DWizard, simply place the CD-ROM that came with the DI-604UP in your computer's CD drive. The following window will open:

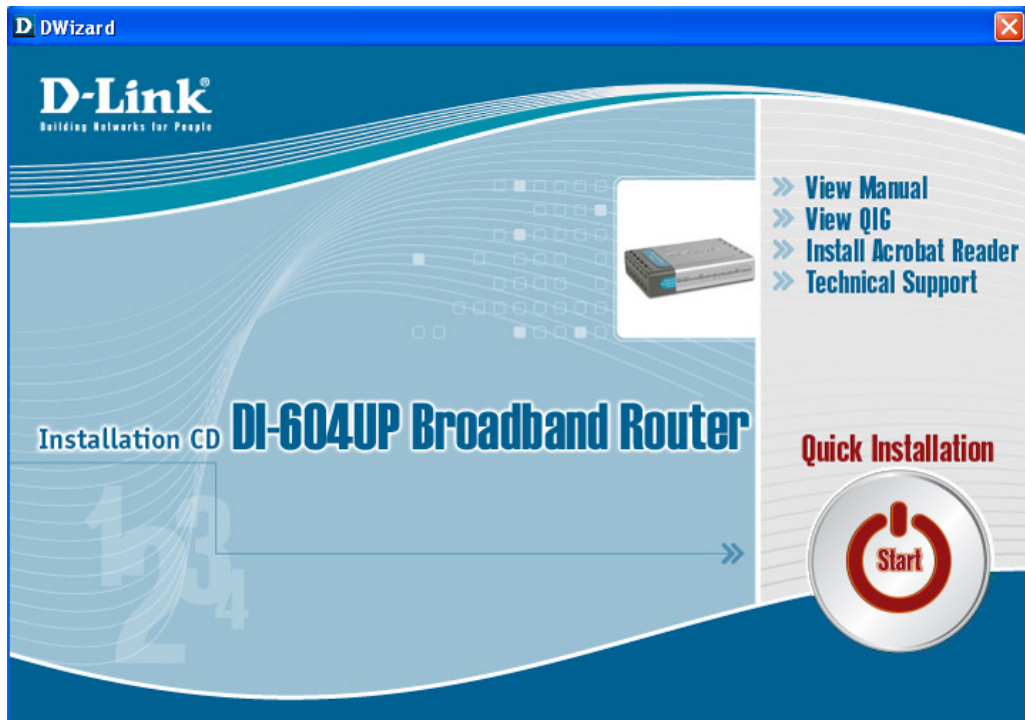


Now, click on the **Quick Installation Start** icon located in the lower right side of the window. The following window will open:

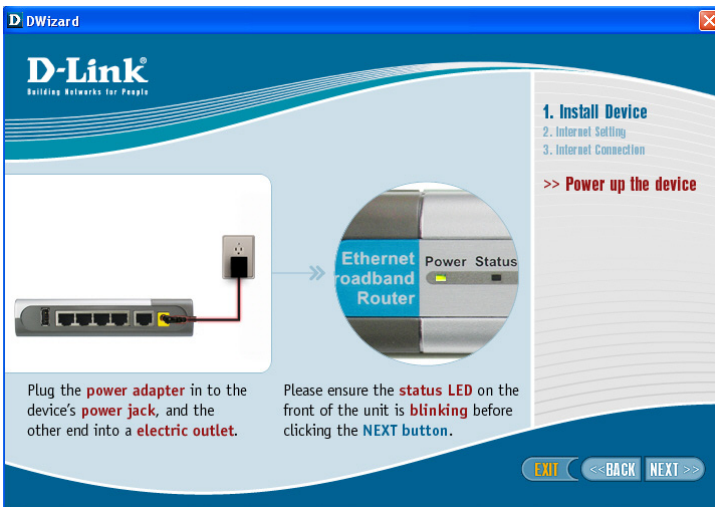

Click **Next** on the window above and follow the on-screen prompts to Connect the device to the computer, Connect the device to the Internet, Check device connectivity, Set your ISP, Set wireless configuration, Check your Internet connection status, ISP configuration, etc.

When you have completed the Router configuration, click the **Exit** button on the final Congratulations window displayed below.

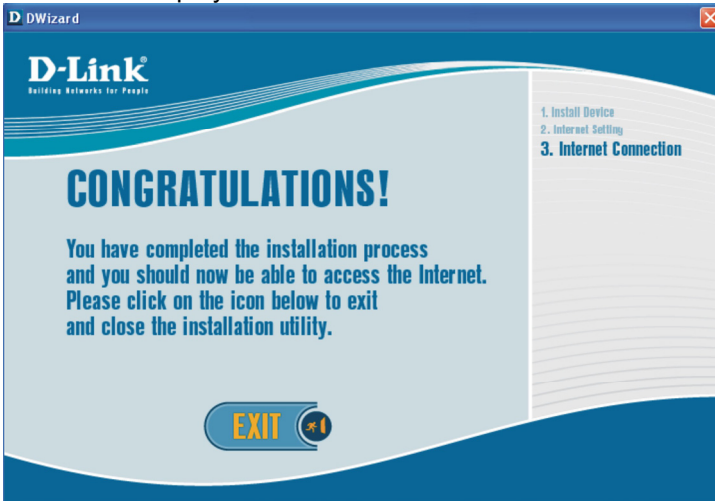

For additional information on how to set up and manage the Router, please see the Appendix at the end of this QIG or consult your DI-604UP User's Guide.

5


Using The Setup Wizard

Open your Web browser and type **"http://192.168.0.1"** into the URL address box. Then press the **Enter** or **Return** key.



The logon pop-up screen will appear.

Type **"admin"** for the username and leave the password field blank.

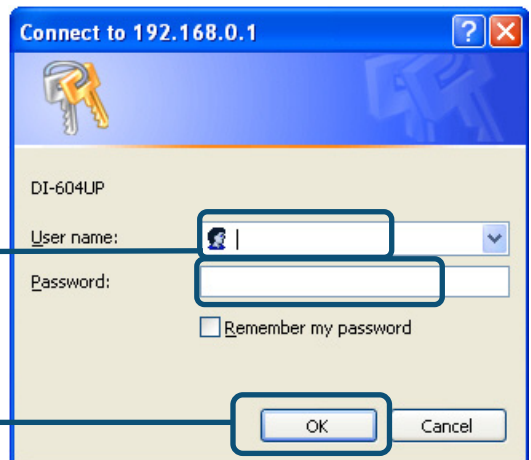


Click **OK**


Once you have logged in, the **Home** screen will appear.




You will see the following screens.

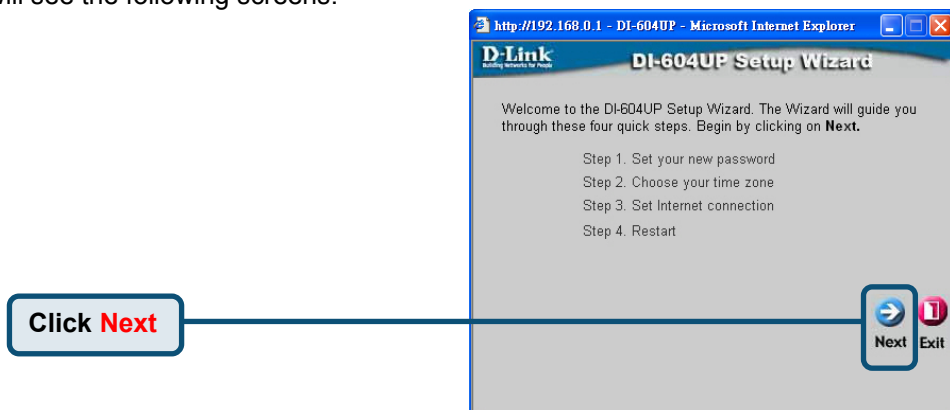

Step 1 - Set up your new password. You have the option to establish a password.

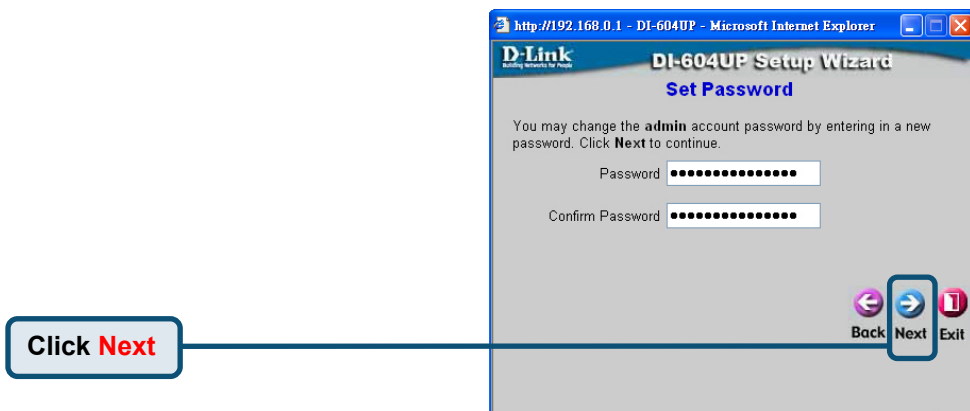


Step 2 - Choose your time zone.

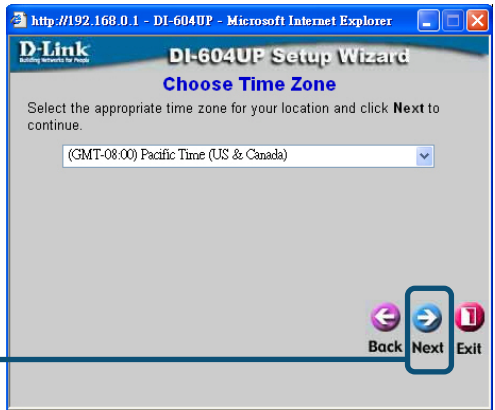


5

The Setup Wizard (continued)

Select the type of Internet connection for your router.

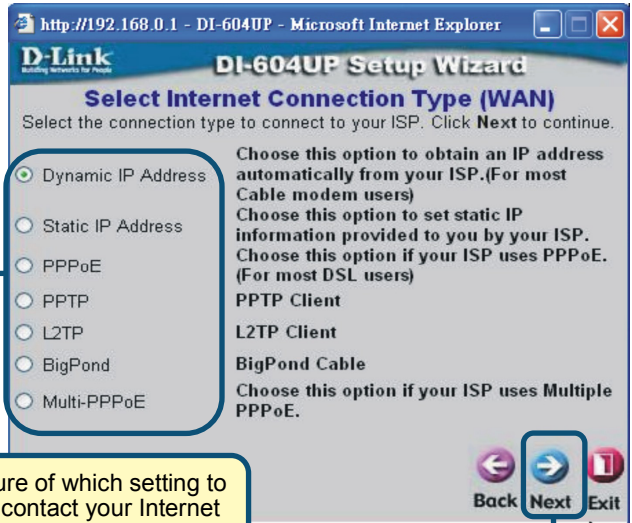

 If you are unsure of which setting to select, please contact your Internet Service Provider.

Click **Next**

If you selected **Dynamic IP Address**, this screen will appear:

“Clone MAC Address” button to automatically copy the MAC address of the network adapter in your computer. You can also manually type in the MAC address.

What is a MAC address? Each network adapter has a discrete Media Access Control (MAC) address. Note that some computers and peripherals may already include built-in network adapters.

Click **Next**

If your ISP requires a **Static IP Address**, and this option is selected, then this screen will appear:

Enter the IP address information originally provided to you by your ISP. You will need to complete all the required fields.

Click **Next**

If your ISP uses **PPPoE** (Point-to-Point Protocol over Ethernet) and this option is selected, then this screen will appear:

http://192.168.0.1 - DI-604UP - Microsoft Internet Explorer

D-Link
Building Networks for People

DI-604UP Setup Wizard

Set PPPoE

The service name is optional but may be required by your ISP. Click **Next** to continue.

User Name

Password

Retype Password

Service Name (optional)

Back Next Exit

Enter in the username and password provided to you by your ISP and retype that same password to verify it.

Click **Next**



Please be sure to remove any existing PPPoE client software installed on your computers.

If your ISP uses **PPTP** and this option is selected, then this screen will appear.

Enter the IP address information originally provided to you by your ISP.

DI-604UP Setup Wizard

Set PPTP Client

Please set you PPTP Client data then press **Next** to continue.

IP Address

0.0.0.0

Subnet Mask

0.0.0.0

Gateway

0.0.0.0

Server IP

0.0.0.0

PPTP Account

PPTP Password

.....

Retype Password

.....

Back

Next

Exit

Click **Next**

If your ISP uses **L2TP** and this option is selected, then this screen will appear.

Enter the IP address information originally provided to you by your ISP.

DI-604UP Setup Wizard

Set L2TP Client

Please set you L2TP Client data then press **Next** to continue.

IP Address

0.0.0.0

Subnet Mask

0.0.0.0

Gateway

0.0.0.0

Server IP

0.0.0.0

L2TP Account

L2TP Password

.....

Retype Password

.....

Back

Next

Exit

Click **Next**

If your ISP is **Big Pond Cable** and this option is selected, then this screen will appear.

Enter in the username and password provided to you by your ISP and retype that same password to verify it.

Click **Next**

http://192.168.0.1 - DI-604UP - Microsoft Internet Explorer

D-Link

DI-604UP Setup Wizard

Set BigPond

Please set your BigPond Cable data then press **Next** to continue

User Name

Password

Retype Password

Auth Server

Back

Next

Exit

If your ISP supports **Multiple PPPoE** and this option is selected, then this window will appear.

Enter the username and password provided to you by your ISP and retype that same password to verify it.

Click **Next**

http://192.168.0.1 - DI-604UP - Microsoft Internet Explorer

Set Multiple PPPoE

The service name is optional but may be required by your ISP. Click **Next** to continue.

User Name

Password

Retype Password

Service Name (optional)



Back

Next

Exit

6

Your Setup is Complete!

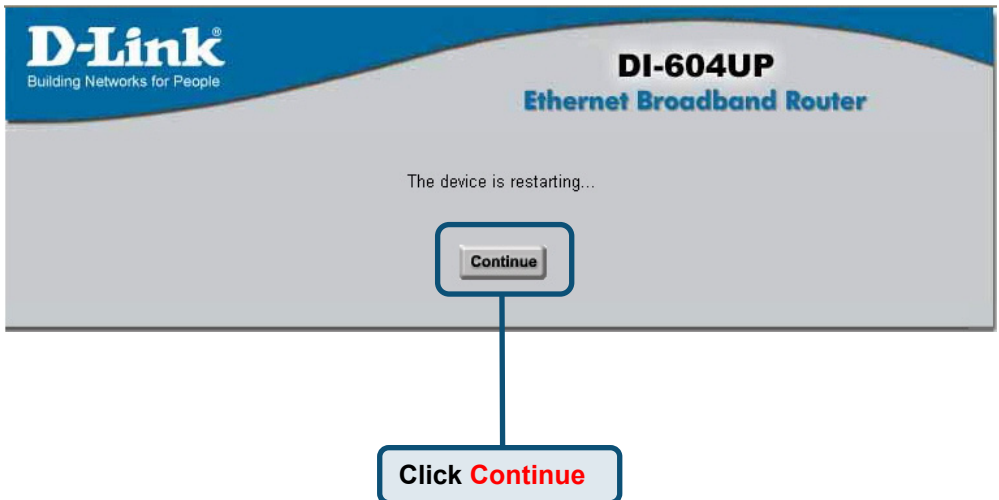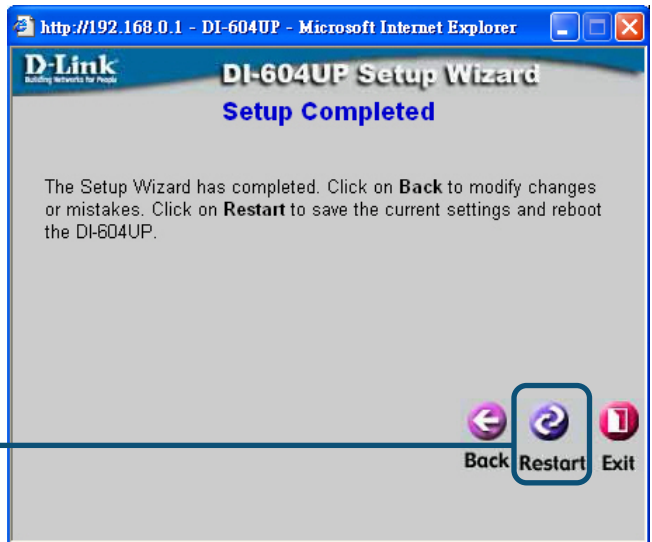


You will be returned to the **Home** tab.

7 Your Internet Connection

Click **Exit**

Relaunch your Web browser (i.e., *Internet Explorer* or *Netscape Navigator*), to link to your favorite Web site to test your Internet connection.

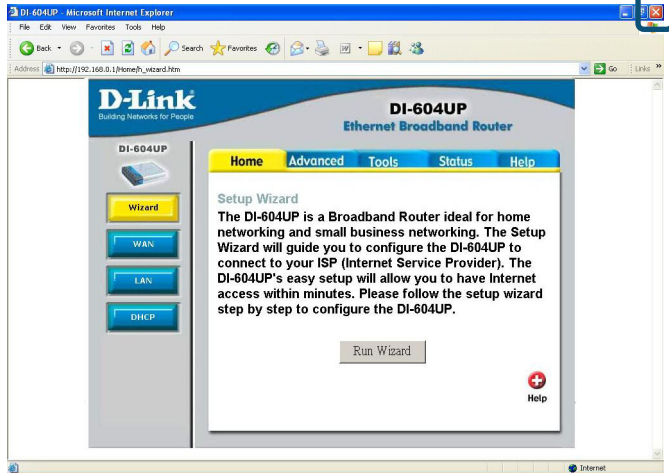




For additional settings or information, refer to the **Advanced**, **Tools**, or **Status** tabs on the web-management interface; or to the manual located on the CD-ROM.

APPENDIX

To connect to the network, make sure the network adapter in your computer is configured properly. Here's how to configure the network adapter to obtain an IP address automatically for the DI-604UP Broadband Router.

For **Microsoft Windows XP**:

Go to **Start > right click on My Network Places > select Properties > Double-click on the Network Connection** associated with the Ethernet adapter (i.e., D-Link DFE-530TX+).

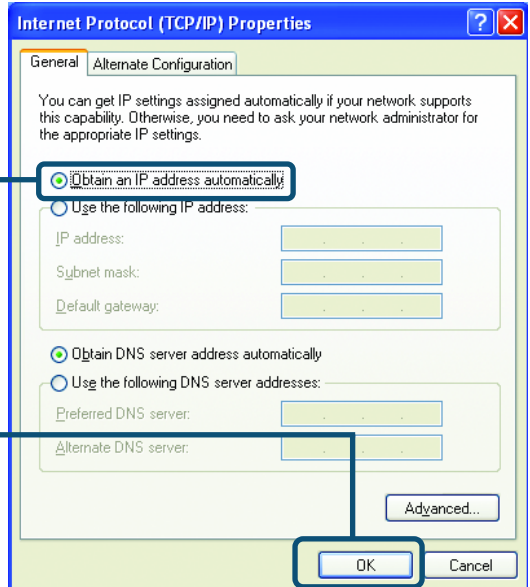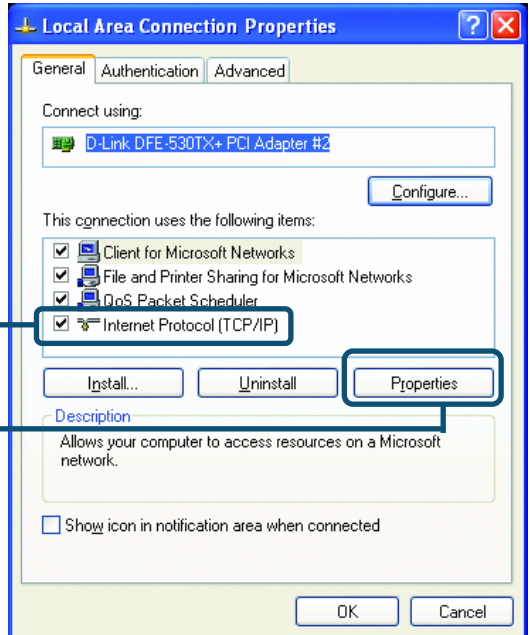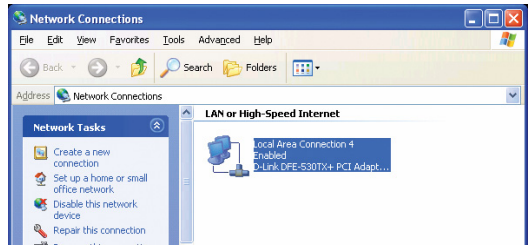

Click **Internet Protocol (TCP/IP)**

Click **Properties**

Select **Obtain an IP address automatically**

Click **OK**

Restart your
computer



For Apple Macintosh OS X:

Go to the **Apple Menu** and **Select System Preferences**.


Click on **Network**

Select **Built-in Ethernet** in the Show pull-down menu

Select **Using DHCP** in the Configure pull-down menu

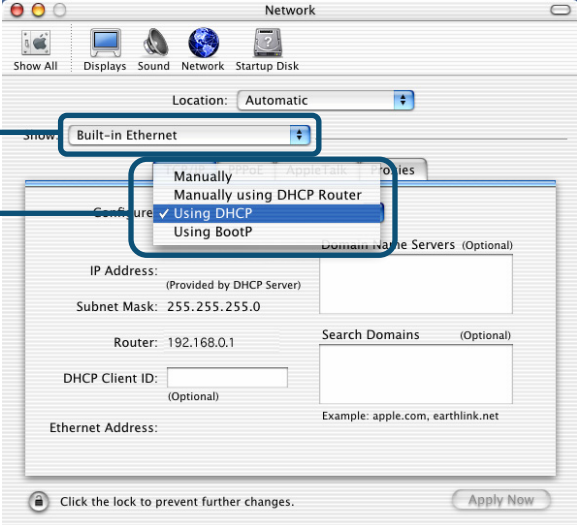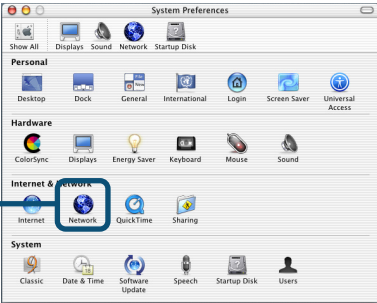

Click on **Apply Now**

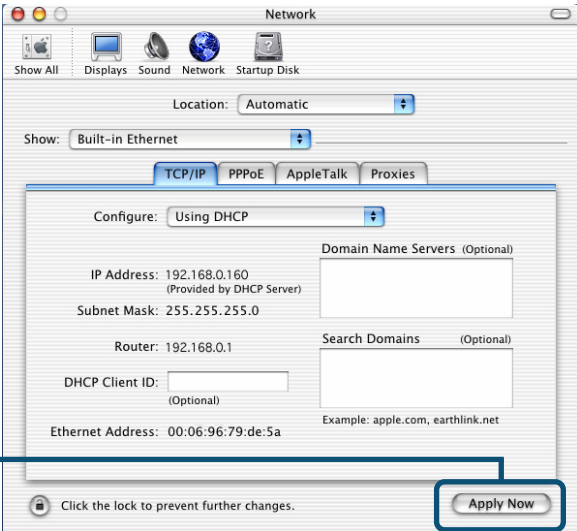

The IP address information, the Subnet Mask, the Router's IP address and the Ethernet adapter address will appear.